

SS2 Type Inverter

□ Type : SS2-021-0.75K

number	voltage
2	200V
4	400V

number	voltage
1	1 \emptyset
3	3 \emptyset

number	Inverter capacity
0.4K ~ 3.7K	Inverter capacity is KW



SS2 Features



- Start torque 150%/3HZ
- Speed precision is within 1%
- shuttle knob
- Orbit (installation side by side)
- Auto pressing control terminal
- Cooling fan can change self
- Set frequency gain function
- Stable pulse output function
- CE certification

SS2 Features




- shuttle knob



- Orbit (installation side by side)





- Auto pressing control terminal

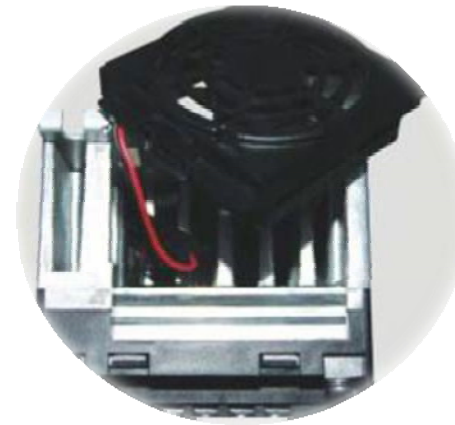

- Fan (can change self)


SS2 Features

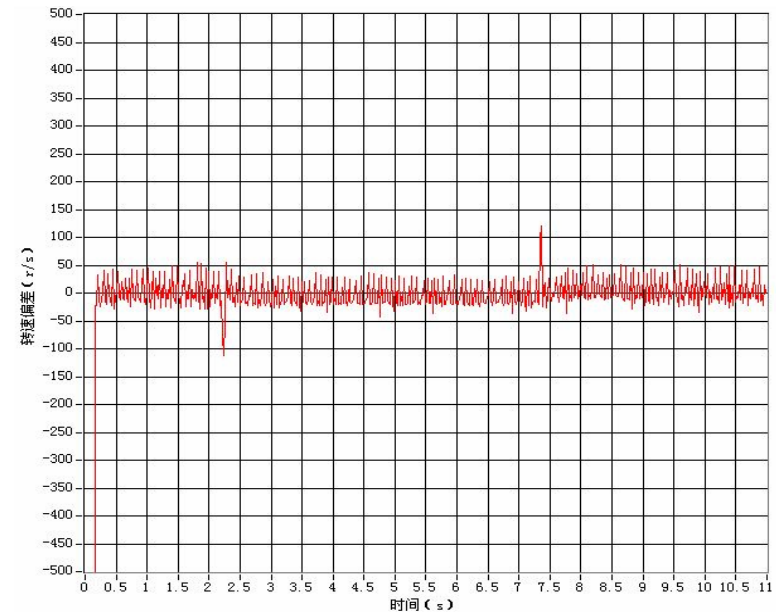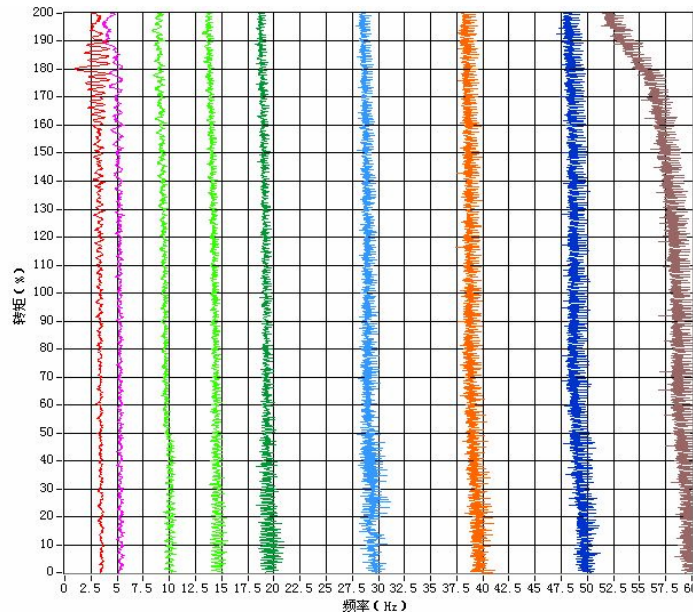


- 32-bit CISC CPU high computation.
- Low speed output, 150%/3HZ start torque.
- Speed precision is within 1% (0%~100% load).
- Stall prevention operation leave maximum to 250%.

Comparative-100% Load on/off


- ◆ Test conditions :INV output frequency is 50Hz,short time input 100% load, and recode speed of motor.

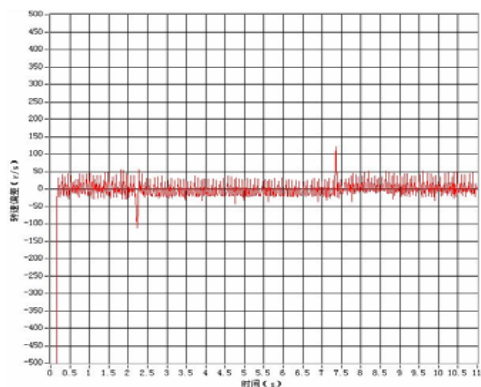


Shihlin-SS2

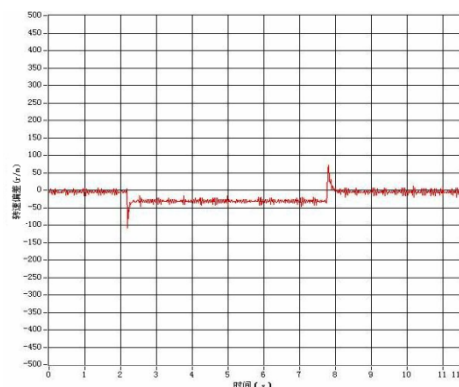


Delta-E

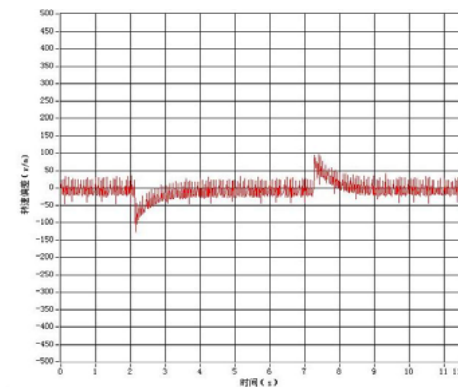

Mitsubishi-D700

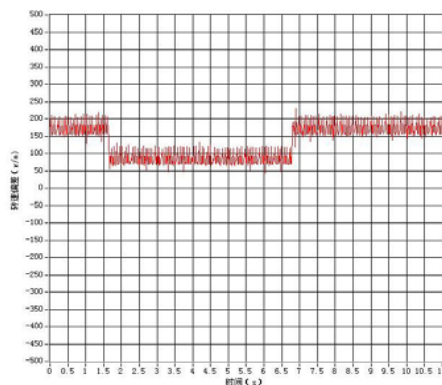


Delta-EL

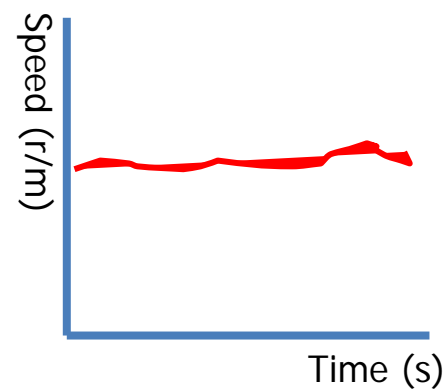


Comparative-Torque


- ◆ Test conditions :INV output different frequency, Increasing load until 200%, and recode speed of motor.

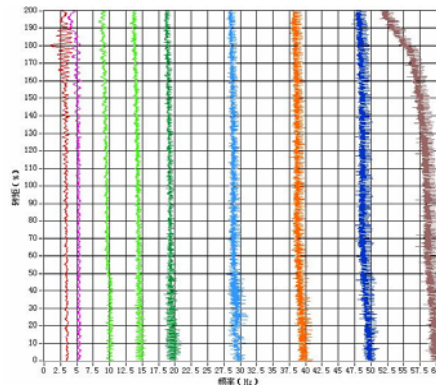


Shihlin-SS2

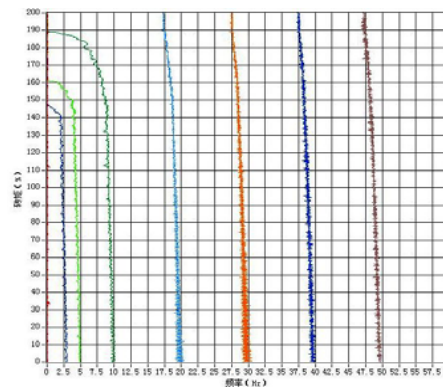

Delta-E

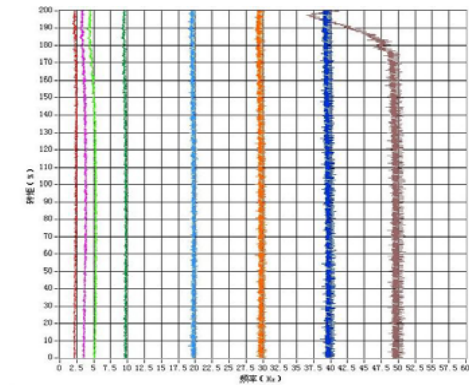

Mitsubishi-D700

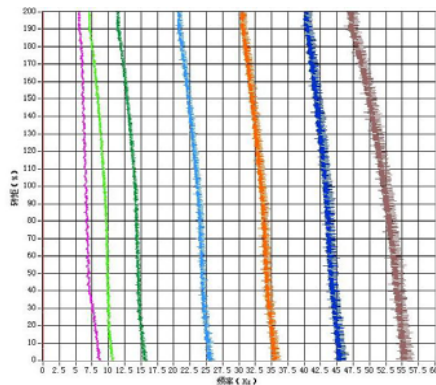

Delta-EL

